


XKP _____
Pool Pump

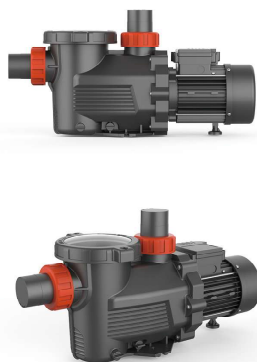

Application

- It is used for water circulation in all kinds of small domestic swimming pools. Slightly dirty water with solids in suspension can be perfectly filtered.

Pump

- Engineering plastic pump body
- Medium temperature: 5 - 50°C
- Environmental temperature: ≤40°C
- Max. suction: 3.5 m

Motor

- Motor with copper or aluminum winding
- Built-in thermal protector for single phase motor
- Insulation class: F
- Enclosures class: IPX5


Identification Codes

XKP 16 06

- Product Style
- Power (x100W)
- Pool Pump

Technical Data


Model	Power W	Q(m³/h) Q(l/min)	0	6	12	18	24	30
			0	100	200	300	400	500
XKP606	600	H (m)	10.5	9.4	5.7	-	-	-
XKP806	800		12	11.3	7.7	1.9	-	-
XKP906	900		14.5	13.3	9.7	3.9	-	-
XKP1106	1100		16	15.3	12.3	7.2	-	-
XKP1606	1600		18	17.7	15.6	11.6	6.2	-
XKP2206	2200		19.5	19	17.2	13.6	8.6	2.2



Dimension


Model	DN1	DN2	A (mm)	B (mm)
XKP606	48.5\50	48.5\50	214	518
XKP806			214	518
XKP906			214	518
XKP1106			214	518
XKP1606			250	548
XKP2706			250	548

Hydraulic Performance Curves

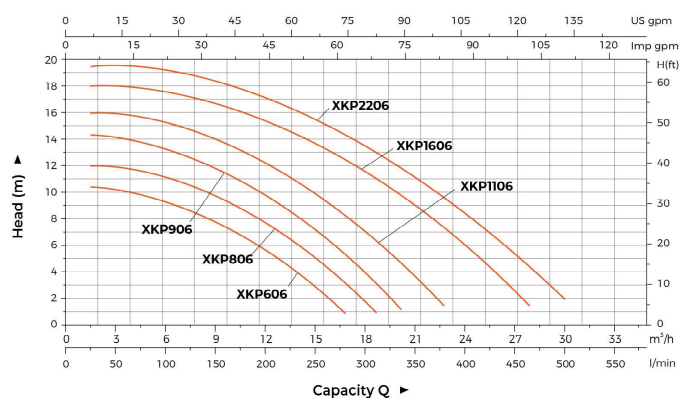

Material Table

No.	Part	Material	No.	Part	Material
1	Pump cover nut		15	End plate	
2	Pump cover		16	Fan	
3	O-sealing ring		17	Fan cover	
4	Sieve		18	Plastic sack	
5	Water outlet connector		19	Pump support	
6	Nut		20	Ball bearing	
7	Support foot		21	Motor	
8	Motor stator		22	Mechanical seal	
9	Terminal box		23	Switch seal washer	
10	Terminal box ring		24	Impeller	
11	Capacitor		25	Diffuser	
12	Seal washer		26	Switch seal washer	
13	Terminal cover		27	Pump handle	
14	Power cable		28	Drain plug	



Package Information

Model	GW (Kgs)	L (mm)	W (mm)	H (mm)	Quantity (PCS/20TEU)
XKP0606	9.6	575	225	255	900
XKP0806	10.4	575	225	255	900
XKP0906	11.2	575	225	255	900
XKP1106	12.1	575	225	255	900
XKP1606	15.2	605	225	255	837
XKP2206	16.8	605	225	255	837

